


WIT 63-125kW Hybrid Inverter

(WIT 63/75/85/100/125K-XHU)

- Multiple MPPTs input, 2.0 DC/AC ratio
- Wide battery voltage range
- 100% unbalanced load when backup
- 160% rated AC overload capability
- Built-in UPS function and black start
- Supports DG integration and smart load
- Scalable to 10 units for off-grid parallel operation
- Widely adaptable to third-party batteries

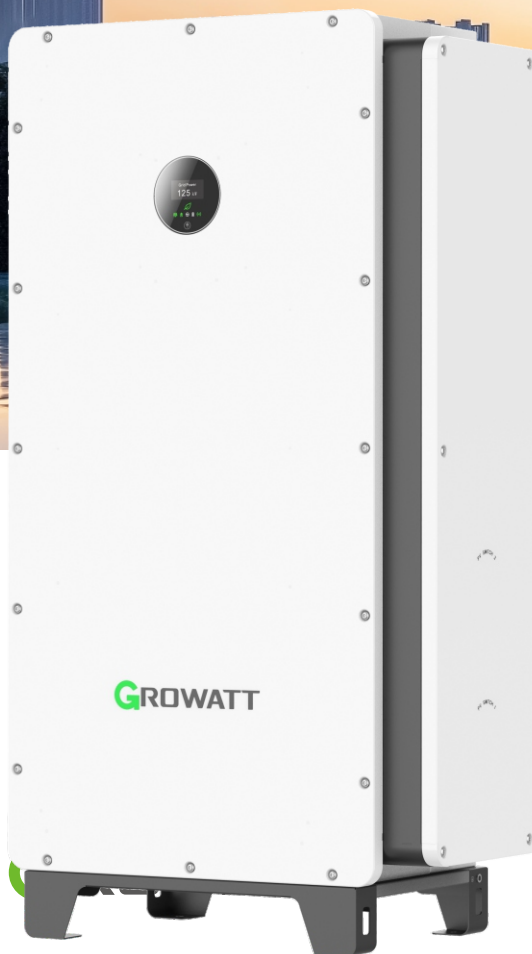

Preliminary Version

P O W E R
- I N G
T O M O R R O W

<https://en.growatt.com>

Datasheet	WIT 63K-XHU	WIT 75K-XHU	WIT 85K-XHU	WIT 100K-XHU	WIT 125K-XHU
Input Data (PV)					
Max. recommended PV power (for module STC)	126kW	150kW	170kW	200kW	250kW
Start voltage			195V		
Max. open circuit voltage of PV			1000V		
MPPT nominal voltage/range			180V-1000V		
Max. input current per MPP tracker			42A		
Max. short-circuit current per MPP tracker			50A		
No. of PV strings per MPP tracker			2		
No. of MPP trackers			10		
Output Data (AC)					
AC nominal power	63kW	75kW	85kW	100kW	125kW
Max. AC apparent power	69.3kVA	82.5kVA	93.5kVA	110kVA	137.5kVA
Nominal AC voltage/range			380/400/415V, -15%~+10%		
AC grid frequency/range			50/60Hz, 45-55Hz/55-65Hz		
Max. output current	105A	125A	141.7A	166.7A	208.3A
Adjustable power factor			-1...+1		
THDi			<3% (@100% load)		
AC grid connection type			3P3W+PE/3P4W+PE		
Input Data (AC/GEN)					
Nominal AC voltage/range			380/400/415V, -15%~+10%		
Nominal AC grid frequency/range			50/60Hz, 45-55Hz/55-65Hz		
AC grid connection type			3P3W+PE/3P4W+PE		
Rated input power	63kW	75kW	85kW	100kW	125kW
Max. input current			250A		
Battery Data (DC)					
Continuous charging and discharging power	63kW	75kW	85kW	100kW	125kW
Battery voltage range			180-1000V(<580V&>900V derating)		
Max charging and discharging current			200A		
BMS communication			RS485/CAN		
Backup Power (AC)					
Rated AC output power	63kW	75kW	85kW	100kW	125kW
Max. AC apparent power	69.3kVA	82.5kVA	93.5kVA	110kVA	137.5kVA
Nominal AC voltage			220/230/240V(L-N), 380/400/415V(L-L)		
Nominal AC output frequency			50/60Hz		
Load connection			3P3W+PE/3P4W+PE		
Max. output current	105A	125A	141.7A	166.7A	208.3A
THDv			<3% (Linear load)		
Load unbalance			100% three-phase unbalanced		
Overload capacity			≤110%: Continues; 160%: 10s		
On/Off grid transfer time			≤10ms		
Efficiency					
Max. efficiency			98.5%		
Protection Devices					
DC reverse polarity protection			Yes		
Battery reverse protection			Yes		
AC/DC surge protection			Type II		
Insulation resistance monitoring			Yes		
Ground fault monitoring			Yes		
Grid monitoring			Yes		
Residual-current monitoring unit			Yes		
AC short-circuit protection			Yes		
Strings monitoring			Yes		
Anti-islanding protection			Yes		
PID protection			Yes		
AFCl function			Yes		
General					
Dimensions (W/H/D)			720/1360/400mm		
Weight			160kg		
Operating temperature range			-30°C~60°C, >50°C derating		
Relative humidity			0~100%		
Altitude			≤4000m		
Topology			Transformerless		
Cooling			Smart air cooling		
Enclosure			IP66		
Display			OLED+LED/WIFI+APP		
Interfaces: RS485/CAN			Yes		
Interfaces: WIFI/4G/LAN			Opt		
Warranty (5/10 years)			Yes/Opt		
CE/CB, ROHS, IEC 62109-1/2, IEC 62116, IEC 61727, IEC 61683, IEC 60068, EN 50549-1-10, EN 50549-2-10, CEI 0-16 & 021, UNE 21700/NTS, NRS 097-2-1					

*1 The maximum open circuit voltage of PV string must be lower than the nominal voltage of the battery system connected to the inverter.

SHENZHEN GROWATT NEW ENERGY CO.,LTD All rights reserved. All specifications are subject to change without notice.

SHENZHEN GROWATT NEW ENERGY CO.,LTD. A: 4-13/F,Building A,Sino-German(Europe)Industrial Park,Hangcheng Ave,Bao'an District,Shenzhen,China
T: + 86 755 2747 1900 F: + 86 755 2749 1460 E: info@ginverter.com